


Hinge Adjustment Instructions

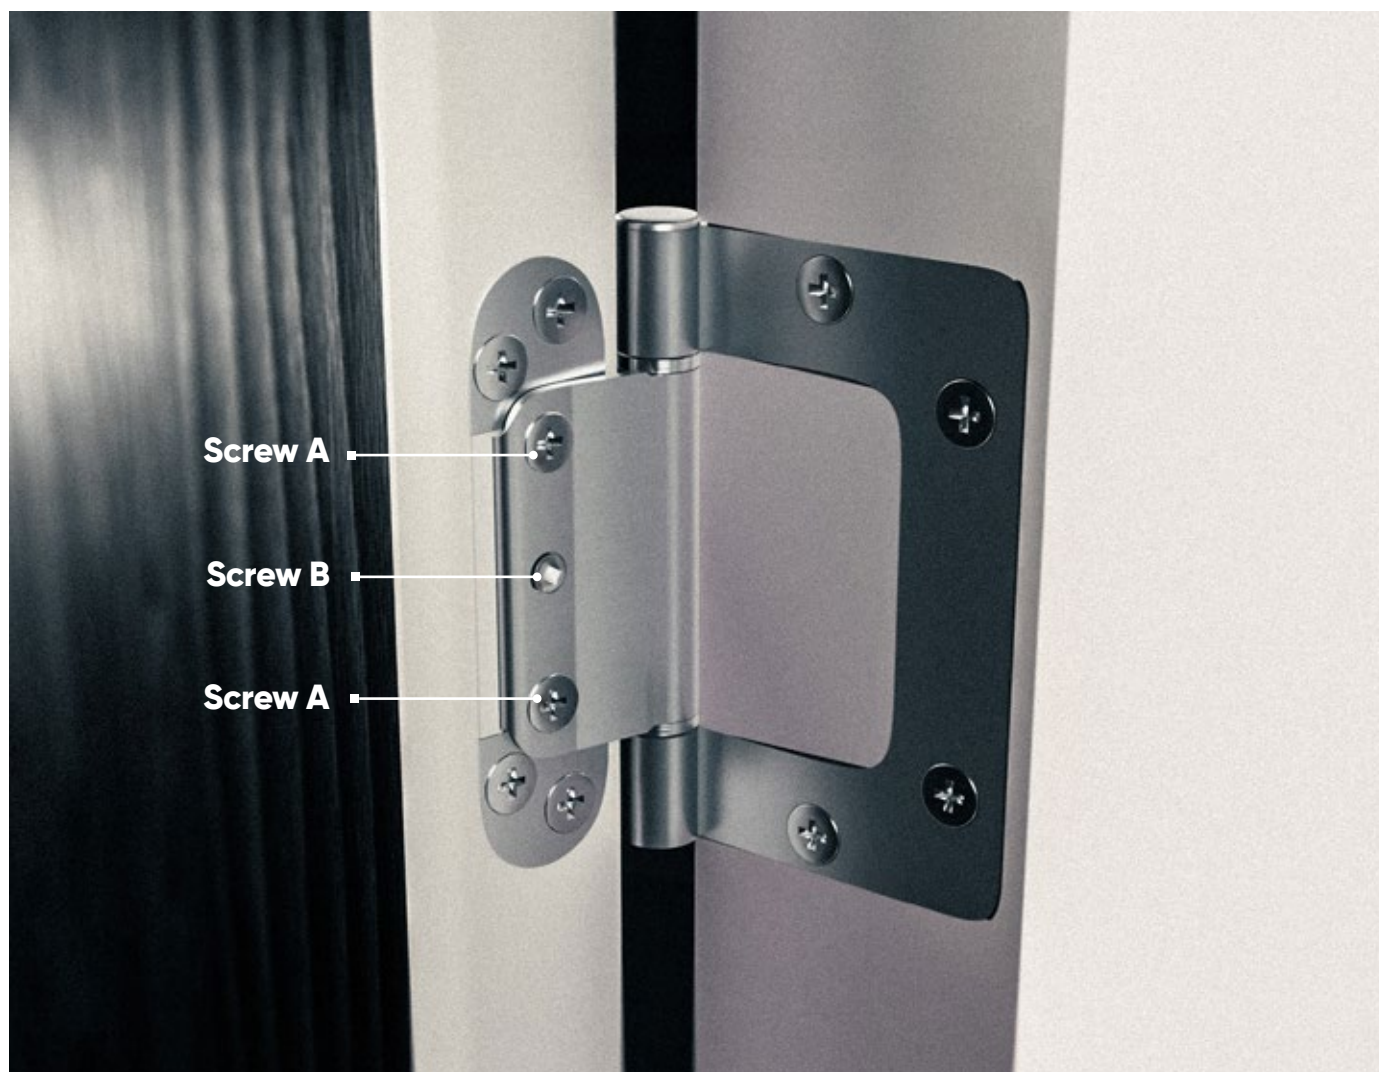

Vertical Adjustment

- 1 All hinges adjust together.
 - 2 Support underside of door with lever.
 - 3 Slacken screw B on each hinge.
 - 4 Lift or lower door to desired position.
 - 5 Tighten screw B on each hinge.
 - 6 Check operation of door.
-

Side Adjustment

- 1 Hinges adjusted individually.
 - 2 To move door closer to frame slacken screw B & tighten A screws.
 - 3 To move door closer to frame slacken screw B & tighten A screws.
 - 4 Check operation of door.
-